




Technical Data Sheet

ARYALOX - AX410



ARYALOX- AX410 one side Alox metalized other side plain Polyester film. The PET surface is to provide a clear, exceptionally high barrier property, for flexible packaging applications.

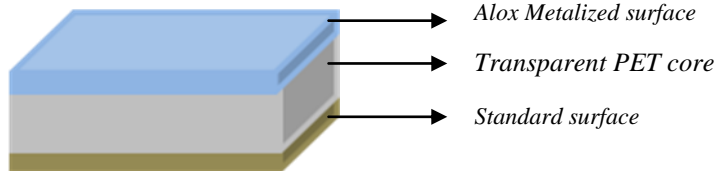

Sr. No.	Properties	Unit	Test Method	Typical Values			
General							
1	Thickness	Micron (Gauge)	JBF Method	12 (48)	15 (60)	23 (92)	
2	Yield	M ² /Kg	JBF Method	59.52	47.62	31.06	
3	Density	gm/cc	ASTM D 1505	1.4	1.4	1.4	
Mechanical							
1	Tensile Strength at break	MD	Kg/cm ² (Kpsi)	ASTM D 882	2100 (29.8)	2100 (29.8)	2000 (29.8)
		TD			2200 (31.2)	2200 (31.2)	2100 (29.8)
2	Elongation at break	MD	%	ASTM D 882	120	120	120
		TD			110	110	110
3	Co-efficient of friction	Static	--	ASTM D 1894	0.55	0.55	0.55
		Dynamic			0.50	0.50	0.50
Thermal							
1	Shrinkage @ 150 ^o C/30'	MD	%	ASTM D 1204	2.0	2.0	2.0
		TD			0.4	0.4	0.4
2	Melting Point	^o C	DSC	255	255	255	
Optical							
1	Haze	%	ASTM D 1003	2.5	2.5	2.5	
Barrier Properties							
1	M.V, T.R 38 ^o C 90%RH	gm/m ² /day	ASTM F 1249	≤ 1.0			
		gm/100in ² /day		0.06			
2	O.T.R 23 ^o C 50 %RH	cc/m ² /day	ASTM F 1927	≤ 1.2			
		cc/100in ² /day		0.07			
Physical							
1	Roll Length	Meter	JBF Method	≤12000			
2	Width	mm	JBF Method	-0, +3			
3	Splice	--	JBF Method	Max. 10% roll with one splice			

MD = Machine Direction, TD = Transverse Direction

Storage & Handling: ARYALOX need to be stocked in a closed warehouse & should not be exposed to direct sun light or light sources. Avoid extreme humidity and heat. It is recommended to store below 40°C in dry places in original packing.

Food Contact: ARYALOX complies with EC and FDA regulations on packaging for indirect contact with foodstuffs. Specific document and MSDS are available on request.

Disclaimer: The information given above is to the best of our knowledge and experience. Some of the properties can be changed as a result of suppliers' efforts to improve upon the quality or production efficiency of the subject. The information is believed to be true and accurate and is not intended to violate any statutory condition or right of a third party. **JBF** makes no warranty, express, or implied, as to the fitness of the product for any specific use or purpose. The above data is purely for readers' consideration, investigation, and verification and should be read in conjunction with the conditions for sale or contract.